

HOSPITAL BED

Enterprise[®] 8000X



Inspired design can be refreshingly simple!

The Enterprise 8000X bed is the latest general use hospital bed in the Enterprise range. The new design may offer both caregiver and patient benefits in the key areas of safety, clinical efficacy and ease of use.

A well-designed hospital bed can offer significant advantages. These include enhanced safety, increased patient independence and improved efficiency. A hospital bed needs to be as user friendly as possible, enabling the caregiver time to concentrate on their patient.

Enterprise 8000X bed is easy and intuitive to use, thanks to clear, simple icons and controls designed to make the operation of bed functions as straightforward as possible.

Key Features

Enterprise 8000X bed also has an extensive offering of accessory items, which both complements the bed and provides additional benefits for patients and carers. Please contact your local Arjo representative for further details.



INFECTION CONTROL

The open architecture design allows ease of access to help improve decontamination procedures. Deck sheets are lightweight, smooth and easily removed.



CURVED MATTRESS DECK

The patented Bio-Contour profiling system blends a unique combination of bed movements with a curved mattress deck.



CARDIAC CHAIR POSITION

The caregiver can easily adjust the bed into a cardiac chair position with our simple to use control panel.



3 STEP BED EXTENSION

Different bed lengths are now easily configurable in a single sub-frame, offering a simple to use, multi-length hospital bed for greater flexibility and choice.



LOW HEIGHT

A key advantage in reducing the risk of injury through falls.



30 DEGREE BACKREST ANGLE

The backrest will pause when raised to an angle of 30 degrees, ensuring easy and positive back-rest adjustment time after time.




PIT STOP MAINTENANCE

Designed for 'Pit Stop Maintenance'-open accessibility means changes such as actuator, control box and battery can be carried out in situ within a few minutes by one person.




ATTENDANT CONTROL PANEL

All new One-Button-Push control panel with updated graphics and layout for intuitive ease of use. Features auto-CPR and auto lock-out.



UNDERBED LIGHT

The bed exit area on both sides of the bed is illuminated to help guide patients when leaving the bed in a poorly lit room.

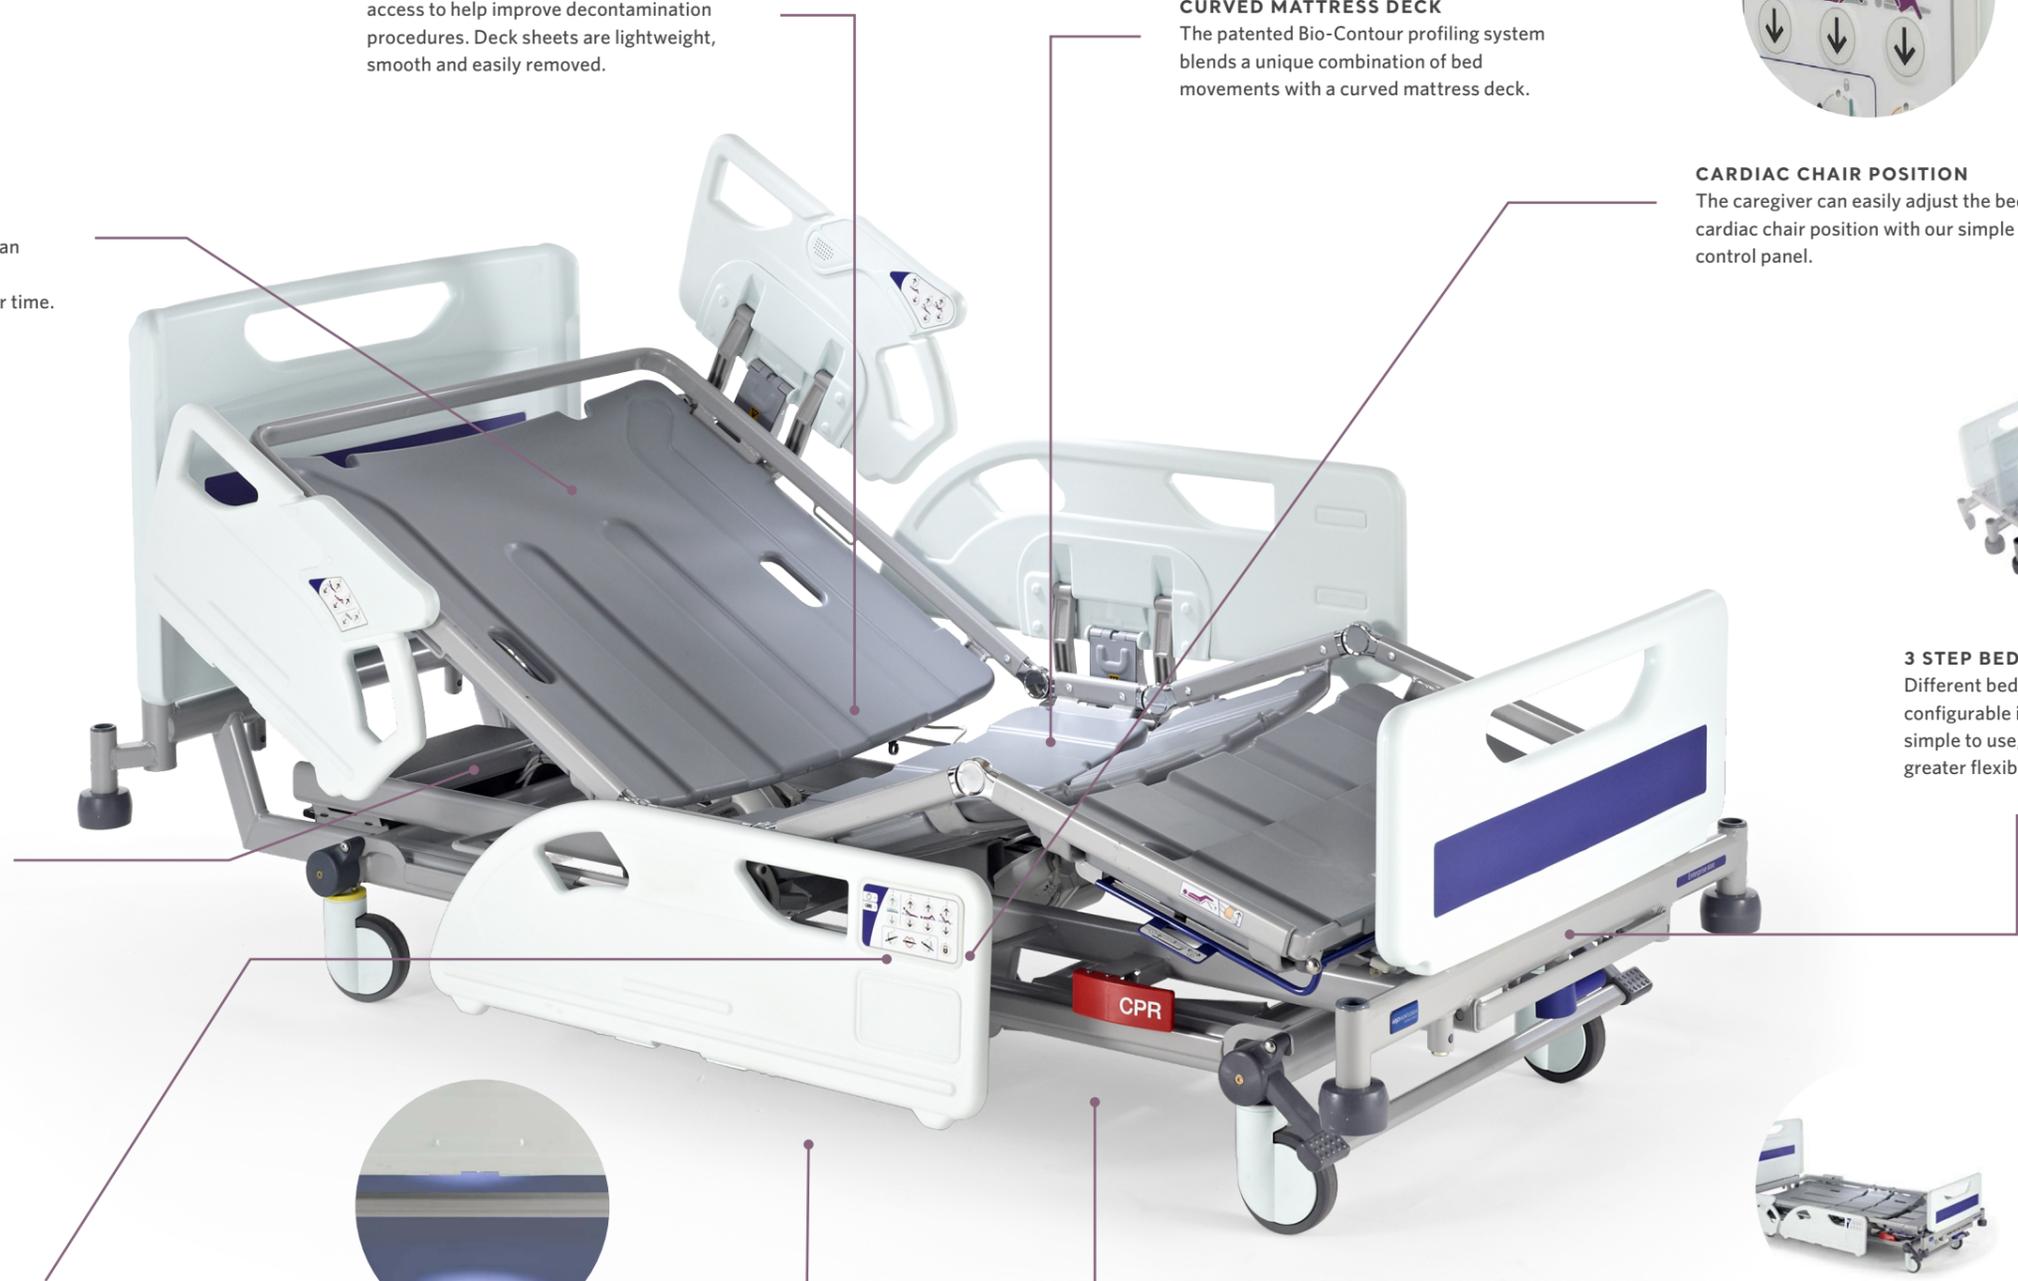

Product Specifications

| FEATURES | |
|--|------|
| Electrically operated backrest, knee-break and height adjustment | • |
| Electrically operated Trendelenberg / Reverse Trendelenberg tilt | ±12° |
| Split side rails with intergrated controls | • |
| Auto-CPR and Auto-contour button | • |
| Battery back-up | • |
| Bio-Contour profiling system | • |
| One button chair position | • |
| Dual sided CPR levers | • |
| Under-bed light | • |
| 30° backrest angle pause | • |
| Angle indicators for backrest | • |
| Built-in bed extension with mattress platform extension | • |
| Removable head and foot panels with choice of colour infills | • |
| Drainage bag rails | • |
| Removable plastic deck sheets (curved or flat) | • |
| Linked braking / steering system with four braking castors | • |
| Soft drop safety sides | (•) |
| 125mm single wheel castors | (•) |
| 150mm single wheel castors | (•) |
| 150mm twin wheel castors | (•) |
| Additional brake pedals at head end | (•) |
| Full width brake bar (foot end only) | (•) |
| DIN rails | (•) |
| Pull-out linen shelf | (•) |
| Foot end ACP | (•) |
| Variable Height Foot switch | (•) |
| Non-Powered 5th Wheel | (•) |
| IndiGo Intuitive Drive Assist | (•) |

• Standard (•) Optional

| SPECIFICATIONS | |
|--|---------------------------------|
| Overall standard length | 2350 mm (HOB), 2300 mm (HOD) |
| Overall width | 1030 mm |
| Mattress length standard | 2020 mm |
| Mattress width | 880 mm |
| Overall extended length | 2470 mm (HOB), 2420 mm (HOD) |
| Mattress extended length | 2140 mm |
| Overall length short | 2240 mm (HOB), 2190 mm (HOD) |
| Mattress length short | 1910 mm |
| Top height (with 125 mm castors) | 760 mm |
| Low height (with 125 mm castors) | 320 mm |
| Backrest length | 850 mm |
| Seat length | 215 mm |
| Calf length | 560 mm |
| Thigh length | 365 mm |
| Safe working load / Maximum patient weight | 250 kg / 185 kg |
| Head down tilt | 12° |
| Foot down tilt | 12° |
| Backrest angle | 62° |
| Backrest pause | 30° |
| Thigh angle | 20° |
| Calf angle | 16° |
| Ingress protection | IPX4 |
| Shock protection | Class 1, Type B |
| Power in | 1.25A at 230V AC 50 / 60Hz |
| Power in | 2A at 120V AC 50 / 60Hz |
| Safety standard | IEC60601-2-52 |

Note: Available in Head off Deck (HOD) and Head off Base (HOB) configurations

March 2020. Only Arjo designed parts, which are designed specifically for the purpose, should be used on the equipment and products supplied by Arjo. As our policy is one of continuous development we reserve the right to modify designs and specifications without prior notice. ® and ™ are trademarks belonging to the Arjo group of companies.
© Arjo, 2020

At Arjo, we believe that empowering movement within healthcare environments is essential to quality care. Our products and solutions are designed to promote a safe and dignified experience through patient handling, medical beds, personal hygiene, disinfection, diagnostics, and the prevention of pressure injuries and venous thromboembolism. With over 6000 people worldwide and 60 years caring for patients and healthcare professionals, we are committed to driving healthier outcomes for people facing mobility challenges.

Arjo AB · Hans Michelsensgatan 10 · 211 20 Malmö · Sweden · +46 10 335 4500

www.arjo.com